# DTM64307C

## 1GB - 240-Pin 1Rx8 Registered ECC DDR3 DIMM

### Identification

DTM64307C 128Mx72

**Performance range**

| Clock / Module Speed / CL-$t_{RCD}$ -$t_{RP}$ |
|---|
| 533 MHz / PC3-8500 / 8-8-8 |
| 533 MHz / PC3-8500 / 7-7-7 |
| 400 MHz / PC3-6400 / 6-6-6 |

### Features

- 240-pin JEDEC-compliant DIMM, 133.35 mm wide by 30 mm high
- Operating Voltage: 1.5V ± 0.075
- I/O Type: SSTL_15
- On-board I2C temperature sensor with integrated serial presence-detect (SPD) EEPROM.
- Data Transfer Rate: 8.5 Gigabytes/sec
- Data Bursts: 8 and burst chop 4 mode
- ZQ Calibration for Output Driver and On-Die Termination (ODT)
- Programmable ODT / Dynamic ODT during Writes
- Programmable CAS Latency: 6, 7, and 8
- Bi-Directional Differential Data Strobe signals
- SDRAM Addressing (Row/Col/Bank): 14/10/3
- Fully RoHS Compliant

### Description

DTM64307C is a registered 128Mx72 memory module, which conforms to JEDEC's DDR3, PC3-8500 standard. The assembly is Single-Rank. This Rank is comprised of nine 128Mx8 DDR3 Hynix SDRAMs. One 2K-bit EEPROM is used for Serial Presence Detect and a combination register/PLL, with Address and Command Parity, is also used.

Both output driver strength and input termination impedance are programmable to maintain signal integrity on the I/O signals in a Fly-by topology.

A thermal sensor accurately monitors the DIMM module and can prevent exceeding the maximum operating temperature of 95C.

### Pin Configuration

| Front Side | | | | Back Side | | | |
|---|---|---|---|---|---|---|---|
| 1 $V_{REFDQ}$ | 31 DQ25 | 61 A2 | 91 DQ41 | 121 $V_{SS}$ | 151 $V_{SS}$ | 181 A1 | 211 $V_{SS}$ |
| 2 $V_{SS}$ | 32 $V_{SS}$ | 62 $V_{DD}$ | 92 $V_{SS}$ | 122 DQ4 | 152 DM3 | 182 $V_{DD}$ | 212 DM5 |
| 3 DQ0 | 33 /DQS3 | 63 CK1** | 93 /DQS5 | 123 DQ5 | 153 NC | 183 $V_{DD}$ | 213 NC |
| 4 DQ1 | 34 DQS3 | 64 /CK1** | 94 DQS5 | 124 $V_{SS}$ | 154 $V_{SS}$ | 184 CK0 | 214 $V_{SS}$ |
| 5 $V_{SS}$ | 35 $V_{SS}$ | 65 $V_{DD}$ | 95 $V_{SS}$ | 125 DM0 | 155 DQ30 | 185 /CK0 | 215 DQ46 |
| 6 /DQS0 | 36 DQ26 | 66 $V_{DD}$ | 96 DQ42 | 126 NC | 156 DQ31 | 186 $V_{DD}$ | 216 DQ47 |
| 7 DQS0 | 37 DQ27 | 67 $V_{REFCA}$ | 97 DQ43 | 127 $V_{SS}$ | 157 $V_{SS}$ | 187 /Event | 217 $V_{SS}$ |
| 8 $V_{SS}$ | 38 $V_{SS}$ | 68 $P_{AR\_IN}$ | 98 $V_{SS}$ | 128 DQ6 | 158 CB4 | 188 A0 | 218 DQ52 |
| 9 DQ2 | 39 CB0 | 69 VDD | 99 DQ48 | 129 DQ7 | 159 CB5 | 189 $V_{DD}$ | 219 DQ53 |
| 10 DQ3 | 40 CB1 | 70 A10/AP | 100 DQ49 | 130 $V_{SS}$ | 160 $V_{SS}$ | 190 BA1 | 220 $V_{SS}$ |
| 11 $V_{SS}$ | 41 $V_{SS}$ | 71 BA0 | 101 $V_{SS}$ | 131 DQ12 | 161 DM8 | 191 $V_{DD}$ | 221 DM6 |
| 12 DQ8 | 42 /DQS8 | 72 $V_{DD}$ | 102 /DQS6 | 132 DQ13 | 162 NC | 192 /RAS | 222 NC |
| 13 DQ9 | 43 DQS8 | 73 /WE | 103 DQS6 | 133 $V_{SS}$ | 163 $V_{SS}$ | 193 /S0 | 223 $V_{SS}$ |
| 14 $V_{SS}$ | 44 $V_{SS}$ | 74 /CAS | 104 $V_{SS}$ | 134 DM1 | 164 CB6 | 194 $V_{DD}$ | 224 DQ54 |
| 15 /DQS1 | 45 CB2 | 75 $V_{DD}$ | 105 DQ50 | 135 NC | 165 CB7 | 195 ODT0 | 225 DQ55 |
| 16 DQS1 | 46 CB3 | 76 /S1** | 106 DQ51 | 136 $V_{SS}$ | 166 $V_{SS}$ | 196 A13 | 226 $V_{SS}$ |
| 17 $V_{SS}$ | 47 $V_{SS}$ | 77 $ODT1$** | 107 $V_{SS}$ | 137 DQ14 | 167 NC (TEST) | 197 $V_{DD}$ | 227 DQ60 |
| 18 DQ10 | 48 $V_{TT}$ | 78 $V_{DD}$ | 108 DQ56 | 138 DQ15 | 168 /RESET | 198 /S3, NC** | 228 DQ61 |
| 19 DQ11 | 49 $V_{TT}$ | 79 /S2, NC** | 109 DQ57 | 139 $V_{SS}$ | 169 $CKE1$** | 199 $V_{SS}$ | 229 $V_{SS}$ |
| 20 $V_{SS}$ | 50 CKE0 | 80 $V_{SS}$ | 110 $V_{SS}$ | 140 DQ20 | 170 $V_{DD}$ | 200 DQ36 | 230 DM7 |
| 21 DQ16 | 51 $V_{DD}$ | 81 DQ32 | 111 /DQS7 | 141 DQ21 | 171 A15 | 201 DQ37 | 231 NC |
| 22 DQ17 | 52 BA2 | 82 DQ33 | 112 DQS7 | 142 $V_{SS}$ | 172 A14 | 202 $V_{SS}$ | 232 $V_{SS}$ |
| 23 $V_{SS}$ | 53 $/E_{RR}\_O_{UT}$ | 83 $V_{SS}$ | 113 $V_{SS}$ | 143 DM2 | 173 $V_{DD}$ | 203 DM4 | 233 DQ62 |
| 24 /DQS2 | 54 $V_{DD}$ | 84 /DQS4 | 114 DQ58 | 144 NC | 174 A12/ /BC | 204 NC | 234 DQ63 |
| 25 DQS2 | 55 A11 | 85 DQS4 | 115 DQ59 | 145 $V_{SS}$ | 175 A9 | 205 $V_{SS}$ | 235 $V_{SS}$ |
| 26 $V_{SS}$ | 56 A7 | 86 $V_{SS}$ | 116 $V_{SS}$ | 146 DQ22 | 176 $V_{DD}$ | 206 DQ38 | 236 $V_{DDSPD}$ |
| 27 DQ18 | 57 $V_{DD}$ | 87 DQ34 | 117 SA0 | 147 DQ23 | 177 A8 | 207 DQ39 | 237 SA1 |
| 28 DQ19 | 58 A5 | 88 DQ35 | 118 SCL | 148 $V_{SS}$ | 178 A6 | 208 $V_{SS}$ | 238 SDA |
| 29 $V_{SS}$ | 59 A4 | 89 $V_{SS}$ | 119 SA2 | 149 DQ28 | 179 $V_{DD}$ | 209 DQ44 | 239 $V_{SS}$ |
| 30 DQ24 | 60 $V_{DD}$ | 90 DQ40 | 120 $V_{TT}$ | 150 DQ29 | 180 A3 | 210 DQ45 | 240 $V_{TT}$ |

** Not used

### Pin Description

| Name | Function |
|---|---|
| CB[7:0] | Data Check Bits |
| DQ[63:0] | Data Bits |
| DQS[8:0], /DQS[8:0] | Differential Data Strobes |
| DM[8:0] | Data Mask |
| CK[1:0], /CK[1:0] | Differential Clock Inputs |
| CKE[1:0] | Clock Enables |
| /CAS | Column Address Strobe |
| /RAS | Row Address Strobe |
| /S[3:0] | Chip Selects |
| /WE | Write Enable |
| A[15:0] | Address Inputs |
| BA[2:0] | Bank Addresses |
| ODT[1:0] | On Die Termination Inputs |
| SA[2:0] | SPD Address |
| SCL | SPD Clock Input |
| SDA | SPD Data Input/Output |
| $V_{SS}$ | Ground |
| $V_{DD}$ | Power |
| $V_{DDSPD}$ | SPD EEPROM Power |
| $V_{REFDQ}$ | Reference Voltage for DQ |
| $V_{REFCA}$ | Reference Voltage for CA |
| $V_{TT}$ | Termination Voltage |
| /Event | Temperature Sensing |
| NC | No Connection |

**Front view**

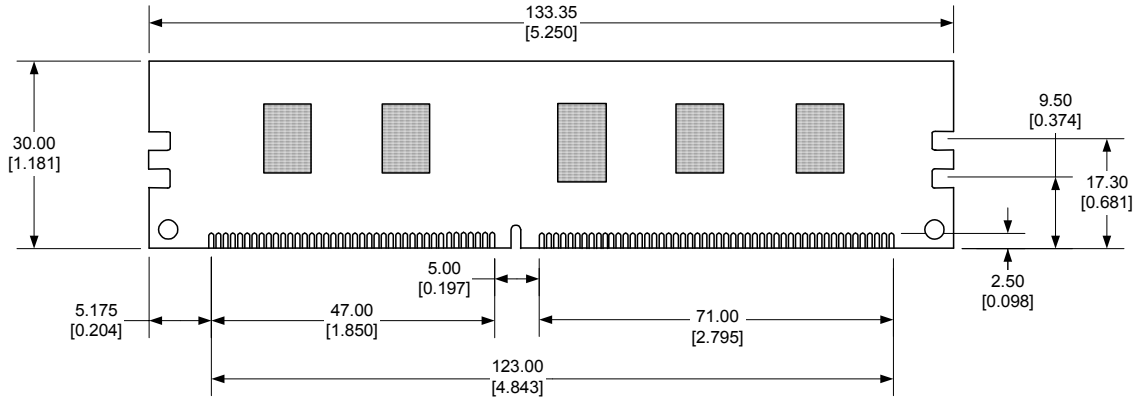


**Back view**

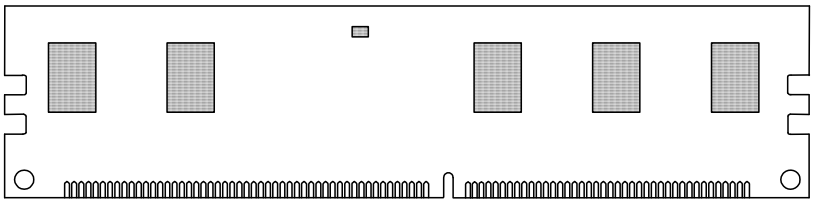

**Side view**




Notes

Tolerances on all dimensions except where otherwise indicated are ±.13 (.005).

All dimensions are expressed: millimeters [inches]

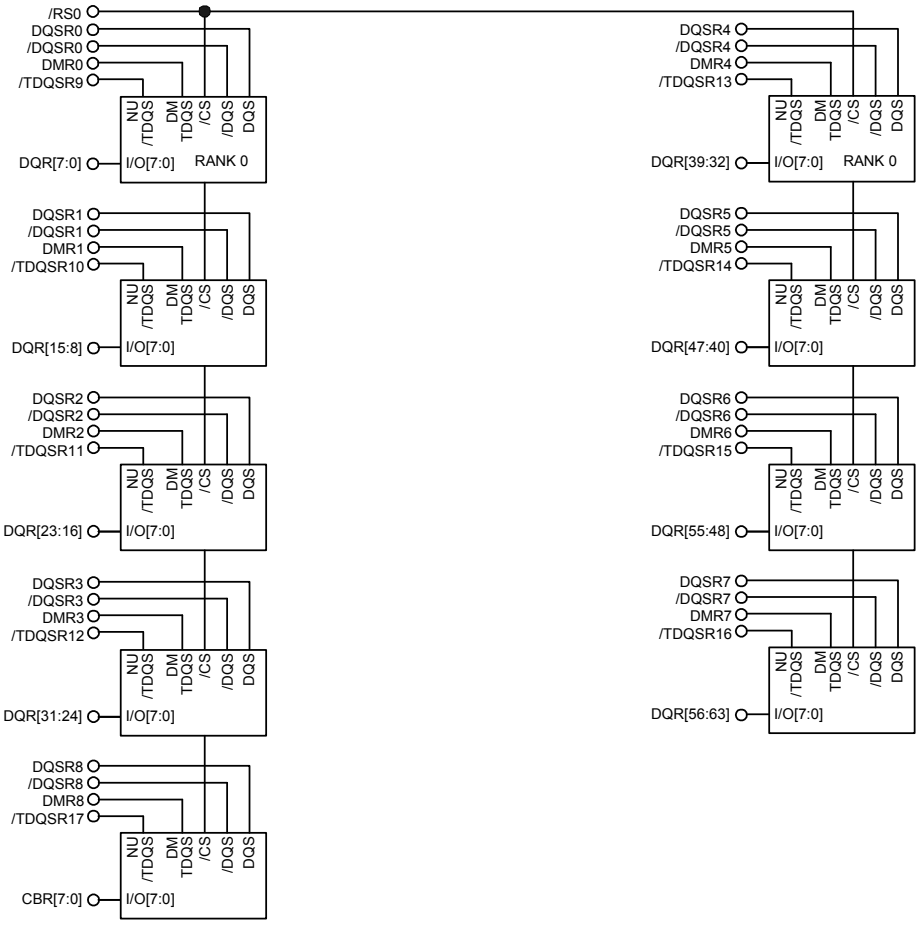
/RS0
DQSR0
/DQSR0
DMR0
/TDQSR9
NU /TDQS
DM TDQS
/CS
/DQS
DQS
DQR[7:0]
I/O[7:0]
RANK 0
DQSR1
/DQSR1
DMR1
/TDQSR10
DQR[15:8]
DQSR2
/DQSR2
DMR2
/TDQSR11
DQR[23:16]
DQSR3
/DQSR3
DMR3
/TDQSR12
DQR[31:24]
DQSR8
/DQSR8
DMR8
/TDQSR17
CBR[7:0]
DQSR4
/DQSR4
DMR4
/TDQSR13
DQR[39:32]
DQSR5
/DQSR5
DMR5
/TDQSR14
DQR[47:40]
DQSR6
/DQSR6
DMR6
/TDQSR15
DQR[55:48]
DQSR7
/DQSR7
DMR7
/TDQSR16
DQR[56:63]


All 15 OHMS
DQ[63:0]
DQR[63:0]
CB[7:0]
CBR[7:0]
DQS[17:0]
DQSR[17:0]
/DQS[17:0]
/DQSR[17:0]
DM[8:0]
DMR[8:0]
/TDQS[17:9]
/TDQSR[17:9]


GLOBAL SDRAM CONNECTS
All 39 OHMS
BA[2:0]R
A[15:0]R
/RASR
/CASR
/WER
VTT


All 39 OHMS
CKE0R
ODT0R
RS0
VTT

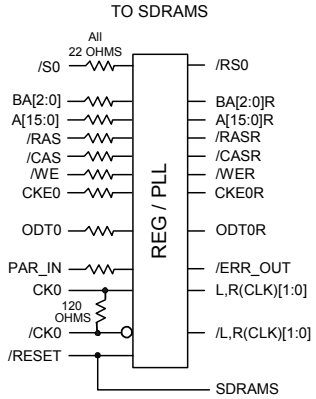
TO SDRAMS
All 22 OHMS
/S0
/RS0
BA[2:0]
BA[2:0]R
A[15:0]
A[15:0]R
/RAS
/RASR
/CAS
/CASR
/WE
/WER
CKE0
CKE0R
ODT0
ODT0R
PAR_IN
/ERR_OUT
CK0
L,R(CLK)[1:0]
120 OHMS
/CK0
/L,R(CLK)[1:0]
/RESET
REG / PLL
SDRAMS


All 240 OHMS
ZQ
VSS


VDD
All 39 OHMS
100 nF
LCLK0
/LCLK0
VDD
All 39 OHMS
100 nF
RCLK0
/RCLK0

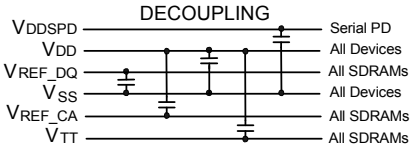
DECOUPLING
VDDSPD
Serial PD
VDD
All Devices
VREF_DQ
All SDRAMs
VSS
All Devices
VREF_CA
All SDRAMs
VTT
All SDRAMs

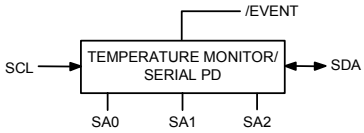
/EVENT
SCL
TEMPERATURE MONITOR/ SERIAL PD
SDA
SA0
SA1
SA2

**Absolute Maximum Ratings**
(Note: Operation at or above Absolute Maximum Ratings can adversely affect module reliability.)

| PARAMETER | Symbol | Minimum | Maximum | Unit |
|---|---|---|---|---|
| **Temperature, non-Operating** | $T_{STORAGE}$ | -55 | 100 | C |
| **Ambient Temperature, Operating** | $T_A$ | 0 | 70 | C |
| **DRAM Case Temperature, Operating** | $T_{CASE}$ | 0 | 95 | C |
| **Voltage on $V_{DD}$ relative to $V_{SS}$** | $V_{DD}$ | -0.4 | 1.975 | V |
| **Voltage on Any Pin relative to $V_{SS}$** | $V_{IN}$,$V_{OUT}$ | -0.4 | 1.975 | V |

Notes:
DRAM Operating Case Temperature above 85C requires 2X refresh.

**Recommended DC Operating Conditions** ($T_A$ = 0 to 70 C, Voltage referenced to $V_{ss}$ = 0 V)

| PARAMETER | Symbol | Minimum | Typical | Maximum | Unit | Note |
|---|---|---|---|---|---|---|
| **Power Supply Voltage** | $V_{DD}$ | 1.425 | 1.5 | 1.575 | V | |
| **I/O Reference Voltage** | $V_{REFDQ}$ | 0.49 $V_{DD}$ | 0.50 $V_{DD}$ | 0.51 $V_{DD}$ | V | 1 |
| **I/O Reference Voltage** | $V_{REFCA}$ | 0.49 $V_{DD}$ | 0.50 $V_{DD}$ | 0.51 $V_{DD}$ | V | 1 |

Notes:
For Reference $V_{DD}$/2 ± 15 mV. The value of VREF is expected to equal one-half VDD and to track variations in the VDD DC level. Peak-to-peak noise on VREF may not exceed ±1% of its DC value. For Reference: VREF = VDD/2 ± 15 mV.

**DC Input Logic Levels, Single-Ended** ($T_A$ = 0 to 70 C, Voltage referenced to $V_{ss}$ = 0 V)

| PARAMETER | Symbol | Minimum | Maximum | Unit |
|---|---|---|---|---|
| **Logical High (Logic 1)** | $V_{IH(DC)}$ | $V_{REF}$ + 0.1 | $V_{DD}$ | V |
| **Logical Low (Logic 0)** | $V_{IL(DC)}$ | $V_{SS}$ | $V_{REF}$ - 0.1 | V |

**AC Input Logic Levels, Single-Ended** ($T_A$ = 0 to 70 C, Voltage referenced to $V_{ss}$ = 0 V)

| PARAMETER | Symbol | Minimum | Maximum | Unit |
|---|---|---|---|---|
| **Logical High (Logic 1)** | $V_{IH(AC)}$ | $V_{REF}$ + 0.175 | - | V |
| **Logical Low (Logic 0)** | $V_{IL(AC)}$ | - | $V_{REF}$ - 0.175 | V |

**Differential Input Logic Levels** ($T_A$ = 0 to 70 C, Voltage referenced to $V_{ss}$ = 0 V)

| PARAMETER | Symbol | Minimum | Maximum | Unit |
|---|---|---|---|---|
| **Differential Input Logic High** | $V_{IH.DIFF}$ | +0.200 | DC:$V_{DD}$ AC:$V_{DD}$+0.4 | V |
| **Differential Input Logic Low** | $V_{IL.DIFF}$ | DC:$V_{SS}$ AC:$V_{SS}$-0.4 | -0.200 | V |
| **Differential Input Cross Point Voltage relative to VDD/2** | $V_{IX}$ | - 0.150 | + 0.150 | V |

**Capacitance** ($T_A$ = 25 C, f = 100 MHz)

| PARAMETER | Pin | Symbol | Minimum | Maximum | Unit |
|---|---|---|---|---|---|
| **Input Capacitance, Clock** | CK0, /CK0 | $C_{CK}$ | 1.5 | 2.5 | pF |
| **Input Capacitance, Address** | BA[2:0], A[15:0], /RAS, /CAS, /WE | $C_I$ | 1.5 | 2.5 | pF |
| **Input Capacitance Control** | /S0, CKE0, ODT0 | $C_I$ | 1.5 | 2.5 | |
| **Input/Output Capacitance** | DQ[63:0], CB[7:0] DQS[8:0], /DQS[8:0], DM[8:0], TDQS[17:9] | $C_{IO}$ | 1.5 | 2.5 | pF |
| **ZQ Capacitance** | ZQ | $C_{ZQ}$ | - | 6 | pF |

**DC Characteristics** ($T_A$ = 0 to 70 C, Voltage referenced to $V_{ss}$ = 0 V)

| PARAMETER | Symbol | Minimum | Maximum | Unit | Note |
|---|---|---|---|---|---|
| **Input Leakage Current (Any input 0 V < VIN < VDD)** | $I_{IL}$ | -18 | +18 | µA | 1,2 |
| **Output Leakage Current (0V < VOUT < VDDQ)** | $I_{OL}$ | -10 | +10 | µA | 2,3 |

Notes:
1) All other pins not under test = 0 V
2) Values are shown per pin
3) DQ, DQS, /DQS and ODT are disabled

## $I_{DD}$ Specifications and Conditions ($T_A$ = 0 to 70 C, Voltage referenced to $V_{ss}$ = 0 V)

| PARAMETER | Symbol | Test Condition | Max Value | Unit |
|---|---|---|---|---|
| **Operating One Bank Active-Precharge Current** | $I_{DD}0$ | Operating current : One bank ACTIVATE-to-PRECHARGE | 1439 | mA |
| **Operating One Bank Active-Read-Precharge Current** | $I_{DD}1$ | Operating current : One bank ACTIVATE-to-READ-to-PRECHARGE | 1529 | mA |
| **Precharge Power-Down Current** | $I_{DD}2P$ | Precharge power down current: (Slow exit) | 318 | mA |
| **Precharge Power-Down Current** | $I_{DD}2P$ | Precharge power down current: (Fast exit) | 453 | mA |
| **Precharge Quiet Standby Current** | $I_{DD}2Q$ | Precharge quiet standby current | 1214 | mA |
| **Precharge Standby Current** | $I_{DD}2N$ | Precharge standby current | 1214 | mA |
| **Active Power-Down Current** | $I_{DD}3P$ | Active power-down current | 498 | mA |
| **Active Standby Current** | $I_{DD}3N$ | Active standby current | 1304 | mA |
| **Operating Burst Write Current** | $I_{DD}4W$ | Burst write operating current | 1844 | mA |
| **Operating Burst Read Current** | $I_{DD}4R$ | Burst read operating current | 1844 | mA |
| **Burst Refresh Current** | $I_{DD}5$ | Refresh current | 2294 | mA |
| **Self Refresh Current** | $I_{DD}6$ | Self-refresh temperature current: MAX Tc = 85°C | 318 | mA |
| **Operating Bank Interleave Read Current** | $I_{DD}7$ | All bank interleaved read current | 2204 | mA |

## AC Operating Conditions

| PARAMETER | Symbol | Min | Max | Unit |
|---|---|---|---|---|
| Internal read command to first data | $t_{AA}$ | 13.125 | 20 | ns |
| CAS-to-CAS Command Delay | $t_{CCD}$ | 4 | - | $t_{CK}$ |
| Clock High Level Width | $t_{CH(avg)}$ | 0.47 | 0.53 | $t_{CK}$ |
| Clock Cycle Time | $t_{CK}$ | 1.875 | 2.500 | ns |
| Clock Low Level Width | $t_{CL(avg)}$ | 0.47 | 0.53 | $t_{CK}$ |
| Data Input Hold Time after DQS Strobe | $t_{DH}$ | 65 | - | ps |
| DQ Input Pulse Width | $t_{DIPW}$ | 400 | - | ps |
| DQS Output Access Time from Clock | $t_{DQSCK}$ | -255 | +255 | ps |
| Write DQS High Level Width | $t_{DQSH}$ | 0.4 | 0.6 | $t_{CK(avg)}$ |
| Write DQS Low Level Width | $t_{DQSL}$ | 0.4 | 0.6 | $t_{CK(avg)}$ |
| DQS-Out Edge to Data-Out Edge Skew | $t_{DQSQ}$ | - | 125 | ps |
| Data Input Setup Time Before DQS Strobe | $t_{DS}$ | 30 | - | ps |
| DQS Falling Edge from Clock, Hold Time | $t_{DSH}$ | 0.2 | - | $t_{CK(avg)}$ |
| DQS Falling Edge to Clock, Setup Time | $t_{DSS}$ | 0.2 | - | $t_{CK(avg)}$ |
| Clock Half Period | $t_{HP}$ | minimum of $t_{CH}$ or $t_{CL}$ | - | ns |
| Address and Command Hold Time after Clock | $t_{IH}$ | 140 | - | ps |
| Address and Command Setup Time before Clock | $t_{IS}$ | 65 | - | ps |
| Load Mode Command Cycle Time | $t_{MRD}$ | 4 | - | $t_{CK}$ |
| DQ-to-DQS Hold | $t_{QH}$ | 0.38 | - | $t_{CK(avg)}$ |
| Active-to-Precharge Time | $t_{RAS}$ | 37.5 | $9*t_{REFI}$ | ns |
| Active-to-Active / Auto Refresh Time | $t_{RC}$ | 50.625 | - | ns |
| RAS-to-CAS Delay | $t_{RCD}$ | 13.125 | - | ns |
| Average Periodic Refresh Interval $0^o C \leq T_{CASE} < 85^o C$ | $t_{REFI}$ | - | 7.8 | µs |
| Average Periodic Refresh Interval $85^o C \leq T_{CASE} < 95^o C$ | $t_{REFI}$ | - | 3.9 | µs |
| Auto Refresh Row Cycle Time | $t_{RFC}$ | 110 | - | ns |
| Row Precharge Time | $t_{RP}$ | 13.125 | - | ns |
| Read DQS Preamble Time | $t_{RPRE}$ | 0.9 | Note-1 | $t_{CK(avg)}$ |
| Read DQS Postamble Time | $t_{RPST}$ | 0.3 | Note-2 | $t_{CK(avg)}$ |
| Row Active to Row Active Delay | $t_{RRD}$ | Max(4nCK, 7.5ns) | - | ns |
| Internal Read to Precharge Command Delay | $t_{RTP}$ | Max(4nCK, 7.5ns) | - | ns |
| Write DQS Preamble Setup Time | $t_{WPRE}$ | 0.9 | - | $t_{CK(avg)}$ |
| Write DQS Postamble Time | $t_{WPST}$ | 0.3 | - | $t_{CK(avg)}$ |
| Write Recovery Time | $t_{WR}$ | 15 | - | ns |
| Internal Write to Read Command Delay | $t_{WTR}$ | Max(4nCK, 7.5ns) | - | ns |

Notes:
1. The maximum preamble is bound by tLZDQS(min)
2. The maximum postamble is bound by tHZDQS(max)

## SERIAL PRESENCE DETECT MATRIX

| Byte# | Function. | Value | Hex |
|---|---|---|---|
| 0 | Number of Bytes Used / Number of Bytes in SPD Device / CRC Coverage. | | 0x92 |
| | Bit 3 ~ Bit 0. SPD Bytes Used - | 176 | |
| | Bit 6 ~ Bit 4. SPD Bytes Total - | 256 | |
| | Bit 7. CRC Coverage - | Bytes 0-116 | |
| 1 | SPD Revision. | Rev. 1.0 | 0x10 |
| 2 | Key Byte / DRAM Device Type. | DDR3 SDRAM | 0x0B |
| 3 | Key Byte / Module Type. | | 0x01 |
| | Bit 3 ~ Bit 0. Module Type - | RDIMM | |
| | Bit 7 ~ Bit 4. Reserved - | 0 | |
| 4 | SDRAM Density and Banks. | | 0x02 |
| | Bit 3 ~ Bit 0. Total SDRAM capacity, in megabits - | 1Gb | |
| | Bit 6 ~ Bit 4. Bank Address Bits - | 8 banks | |
| | Bit 7. Reserved - | 0 | |
| 5 | SDRAM Addressing. | | 0x11 |
| | Bit 2 ~ Bit 0. Column Address Bits - | 10 | |
| | Bit 5 ~ Bit 3. Row Address Bits - | 14 | |
| | Bit 7, 6. Reserved | 0 | |
| 6 | Reserved. | UNUSED | 0x00 |
| 7 | Module Organization. | | 0x01 |
| | Bit 2 ~ Bit 0. SDRAM Device Width - | 8-Bits | |
| | Bit 5 ~ Bit 3. Number of Ranks - | 1-Rank | |
| | Bit 7, 6. Reserved | 0 | |
| 8 | Module Memory Bus Width. | | 0x0B |
| | Bit 2 ~ Bit 0. Primary bus width, in bits - | 64-Bits | |
| | Bit 4, Bit 3. Bus width extension, in bits - | 8-Bits | |
| | Bit 7 ~ Bit 5. Reserved - | 0 | |
| 9 | Fine Timebase (FTB) Dividend / Divisor. | | 0x52 |
| | Bit 3 ~ Bit 0. Fine Timebase (FTB) Divisor | 2 | |
| | Bit 7 ~ Bit 4. Fine Timebase (FTB) Dividend | 5 | |
| 10 | Medium Timebase (MTB) Dividend. | 1 (MTB = 0.125ns) | 0x01 |
| 11 | Medium Timebase (MTB) Divisor. | 8 (MTB = 0.125ns) | 0x08 |
| 12 | SDRAM Minimum Cycle Time (tCKmin). | 1.875ns | 0x0F |
| 13 | Reserved. | UNUSED | 0x00 |
| 14 | CAS Latencies Supported, Least Significant Byte. | | 0x1C |
| | Bit 0. CL = 4 - | | |
| | Bit 1. CL = 5 - | | |
| | Bit 2. CL = 6 - | X | |
| | Bit 3. CL = 7 - | X | |
| | Bit 4. CL = 8 - | X | |
| | Bit 5. CL = 9 - | | |
| | Bit 6. CL = 10 - | | |

| | | | |
|---|---|---|---|
| | Bit 7. CL = 11 - | | |
| 15 | CAS Latencies Supported, Most Significant Byte. | | 0x00 |
| | Bit 0. CL = 12 - | | |
| | Bit 1. CL = 13 - | | |
| | Bit 2. CL =14 - | | |
| | Bit 3. CL = 15 - | | |
| | Bit 4. CL = 16 - | | |
| | Bit 5. CL = 17 - | | |
| | Bit 6. CL = 18 - | | |
| | Bit 7. Reserved. | | |
| 16 | Minimum CAS Latency Time (tAAmin). | 13.125ns | 0x69 |
| 17 | Minimum Write Recovery Time (tWRmin). | 15.0ns | 0x78 |
| 18 | Minimum RAS# to CAS# Delay Time (tRCDmin). | 13.125ns | 0x69 |
| 19 | Minimum Row Active to Row Active Delay Time (tRRDmin). | 7.5ns | 0x3C |
| 20 | Minimum Row Precharge Delay Time (tRPmin). | 13.125ns | 0x69 |
| 21 | Upper Nibbles for tRAS and tRC. | | 0x11 |
| | Bit 3 ~ Bit 0. tRAS Most Significant Nibble - | 1 | |
| | Bit 7 ~ Bit 4. tRC Most Significant Nibble - | 1 | |
| 22 | Minimum Active to Precharge Delay Time (tRASmin), Least Significant Byte. | 37.5ns | 0x2C |
| 23 | Minimum Active to Active/Refresh Delay Time (tRCmin), Least Significant Byte. | 50.625ns | 0x95 |
| 24 | Minimum Refresh Recovery Delay Time (tRFCmin), Least Significant Byte. | 110.0ns | 0x70 |
| 25 | Minimum Refresh Recovery Delay Time (tRFCmin), Most Significant Byte. | 110.0ns | 0x03 |
| 26 | Minimum Internal Write to Read Command Delay Time (tWTRmin). | 7.5ns | 0x3C |
| 27 | Minimum Internal Read to Precharge Command Delay Time (tRTPmin). | 7.5ns | 0x3C |
| 28 | Upper Nibble for tFAW. | | 0x01 |
| | Bit 3 ~ Bit 0. tFAW Most Significant Nibble - | 1 | |
| | Bit 7 ~ Bit 4. Reserved - | 0 | |
| 29 | Minimum Four Activate Window Delay Time (tFAWmin), Least Significant Byte. | 300 | 0x2C |
| 30 | SDRAM Optional Features. | | 0x82 |
| | Bit 0. RZQ / 6 - | | |
| | Bit 1. RZQ / 7 - | X | |
| | Bit 6 ~ Bit 2. Reserved - | | |
| | Bit 7. DLL-Off Mode Support | | |
| 31 | SDRAM Drivers Supported. | | 0x05 |
| | Extended Temperature Range - | X | |
| | Extended Temperature Refresh Rate - | | |
| | Auto Self Refresh (ASR) - | X | |
| | On-die Thermal Sensor (ODTS) Readout - | | |
| | Reserved - | | |
| | Reserved - | | |
| | Reserved - | | |
| | Reserved - | | |

| | | | |
|---|---|---|---|
| 32 | Reserved | € | 0x80 |
| 33-59 | Reserved | UNUSED | 0x00 |
| 60 | Module Nominal Height. | | 0x0F |
| | Bit 4 ~ Bit 0. Module Nominal Height max, in mm - | 29<h<=30 | |
| | Bit 7 ~ Bit5. Reserved - | 0 | |
| 61 | Module Maximum Thickness. | | 0x11 |
| | Bit 3 ~ Bit 0. Front, in mm (baseline thickness = 1 mm) - | 1<th<=2 | |
| | Bit 7 ~ Bit 4. Back, in mm (baseline thickness = 1 mm) - | 1<th<=2 | |
| 62 | Reference Raw Card Used. | | 0x00 |
| | Bit 4 ~ Bit 0. Reference Raw Card - | R/C A | |
| | Bit 6, Bit 5. Reference Raw Card Revision - | Rev.0 | |
| | Bit 7. Reserved - | 0 | |
| 63 | Address Mapping from Edge Connector to DRAM. | | 0x05 |
| | Bit 0. Rank 1 Mapping (Registered DIMM - Reserved) - | | |
| | Bit 7 ~ Bit 1. Reserved - | | |
| 64-69 | Module-Specific Section | UNUSED | 0x00 |
| 70 | Module-Specific Section | | 0x00 |
| 71 | Module-Specific Section | | 0x00 |
| 72-112 | Module-Specific Section | UNUSED | 0x00 |
| 113 | Module-Specific Section. | UNUSED | 0x00 |
| 114-116 | Module-Specific Section | UNUSED | 0x00 |
| 117 | Module Manufacturer ID Code, Least Significant Byte | | 0x01 |
| 118 | Module Manufacturer ID Code, Most Significant Byte | | 0x91 |
| 119 | Module Manufacturing Location | UNUSED | 0x00 |
| 120,121 | Module Manufacturing Date | | 0x20 |
| 122-125 | Module Serial Number | | 0x20 |
| 126 | Cyclical Redundancy Code (CRC). | CRC | 0x4C |
| 127 | Cyclical Redundancy Code (CRC). | CRC | 0x85 |
| 128-131 | Module Part Number | | 0x20 |
| 132 | Module Part Number | D | 0x44 |
| 133 | Module Part Number | A | 0x41 |
| 134 | Module Part Number | T | 0x54 |
| 135 | Module Part Number | A | 0x41 |
| 136 | Module Part Number | R | 0x52 |
| 137 | Module Part Number | A | 0x41 |
| 138 | Module Part Number | M | 0x4D |
| 139 | Module Part Number | | 0x20 |
| 140 | Module Part Number | 6 | 0x36 |
| 141 | Module Part Number | 4 | 0x34 |
| 142 | Module Part Number | 3 | 0x33 |
| 143 | Module Part Number | 0 | 0x30 |
| 144 | Module Part Number | 7 | 0x37 |

| | | | |
|---|---|---|---|
| 145 | Module Part Number | | 0x20 |
| 146,147 | Module Revision Code | | 0x20 |
| 148 | DRAM Manufacturer ID Code, Least Significant Byte | UNUSED | 0x00 |
| 149 | DRAM Manufacturer ID Code, Most Significant Byte | UNUSED | 0x00 |
| 150-175 | Manufacturer's Specific Data | UNUSED | 0x00 |
| 176-255 | Open for customer use | UNUSED | 0x00 |

DATARAM CORPORATION, USA Corporate Headquarters, P.O.Box 7528, Princeton, NJ 08543-7528;
Voice: 609-799-0071, Fax: 609-799-6734; www.dataram.com